

ET-FMP50 Series


Media Processors

Note: ET-FMP50 Series comprises the ET-FMP50, ET-FMP20, and ET-SBFMP10.
Product availability may vary by country or region.

Media Processors
Simplify Multi-Projection
Workflows for
Immersive Experiences



ET-FMP50/FMP20



Function Board
ET-SBFMP10

Note: Product appearance is tentative and subject to change.

■ Main Features

01 | Flexible Design Streamlines Installation

Simplify complex projection-mapping infrastructure with the ET-FMP50 Series, featuring manual and auto camera-based¹ warping/blending and media playback functions to streamline installation, adjustment, and operation workflows in a Panasonic projection ecosystem.

02 | Simple Yet High-Precision Adjustment

Highly precise pixel-based adjustment minimally impacts image quality for faithful reproduction of detailed content. Easily add immersive effects with free-shape and line-masking and unlock intuitive auto adjustment, with no license required.

03 | Smooth and Continuous Content Playback

Based on the Linux[®] OS, the ET-FMP50 Series features high-capacity storage ranging from 512 GB² to 4 TB. It can play H.264 and H.265 codecs at up to 4K resolution and 300 Mbps. In addition, the ET-FMP50 is compatible with the HAP³ codec. The processors are compatible with the NDI[®] standard, allowing audio and video signals to be transmitted via LAN cable.

ET-FMP50 Series			
	ET-FMP50	ET-FMP20	ET-SBFMP10
Type	Box-type		Function board-type
Maximum Video Output Resolution	3840 x 2160/60p x 1 or 1920 x 1080/60p x 4 ⁴		3840 x 2160/60p
Storage	4 TB	512 GB ²	

¹ Compatible cameras (sold separately) comprise NIKON[®] D5200/D5300/D5500/D5600/D7500/Z50. ² For the ET-FMP20 (512 GB) and ET-SBFMP10 (512 GB), approximately 30 GB of the total storage space is allocated for system usage and is unavailable to the user. ³ ET-FMP50 only. Available via a firmware update from CY2025 Q1. ⁴ When four HDMI[™] outputs are used simultaneously.

Reduces the Cost and Complexity of Installation and Cabling

The ET-FMP50/FMP20 is a compact box-type media processor that can be conveniently placed near the projectors with connection via HDMI™. ET-SBFMP10, meanwhile, is a function board that slots into your Panasonic projector's Intel® SDM standard-compatible SLOT¹ to enable connection via LAN cable only, simplifying the system and reducing the need for server room construction.

Convenient Support from a Common Brand

It's best to choose projectors and processors of the same brand since they are designed to work seamlessly together. And if you need support, it's easier to call one company rather than several. Furthermore, the ET-FMP50 Series helps minimize your carbon footprint and reduce resource usage with a consumption of just 64 W² and automated playback scheduling.

¹ Panasonic cannot guarantee compatibility of the ET-SBFMP10 with non-Panasonic projectors. Compatibility with future supported Panasonic models is anticipated. ² Approximate max. power consumption for the ET-FMP50/FMP20. ³ Compatible cameras (sold separately) comprise NIKON® D5200/D5300/D5500/D5600/D7500/Z50. ⁴ Available via a firmware update from CY2025 Q1. ⁵ Download free from the Panasonic global projector website.

Save Time, Enhance Quality with Camera-based Adjustment³

Working with NIKON® cameras³, the ET-FMP50 Series wins back your time by automating complex warping/blending processes with highly precise pixel-based adjustment. View the projection area from the camera's perspective on a PC and click to designate an image display area: content splitting, geometric adjustment, and blending are performed automatically.

Supports High-Quality Video Content

ET-FMP50/FMP20 can output a 3840 x 2160p signal or split it into 1080p quarters for 4x projectors via HDMI™, while the ET-SBFMP10 outputs 3840 x 2160p video. All models support H.264 and H.265 formats, with the ET-FMP50 also supporting the HAP⁴ codec. Play content directly from the processor with media storage up to 4 TB or over NDI®-compatible LAN.

Other Features

- Automatic content splitting via camera (resolutions up to 4K supported)
- Manual color-matching adjustment (automatic is TBA)
- Compatible with Multi Monitoring & Control Software⁵ (software functionality with ET-FMP50 Series is currently limited to on/off status monitoring only)
- Playback scheduling function

Specifications

Model	ET-FMP50	ET-FMP20	ET-SBFMP10
Type	Box-type		Function board-type
Terminals	LAN	RJ-45 x 1 for network connection, 10Base-T/100Base-TX, 1000Base-T, NDI® compatible	
	HDMI™ OUT 1/2/3/4	HDMI™ x 4, Audio signal: Linear PCM (Sampling frequency: 48 kHz/44.1 kHz)	
	Audio OUT	3.5 mm stereo mini-jack	
Max. video output resolution	3840 x 2160/60p x 1 or 1920 x 1080/60p x 4 ¹		3840 x 2160/60p
Video format	HAP ² / H.264, 8-bit, 3840 x 2160 pixels, 60p, YPbPr 4:2:0, 300 Mbps / H.265, 8-bit, 4096 x 4096 pixels, 60p, YPbPr 4:2:0, 300 Mbps	H.264, 8-bit, 3840 x 2160 pixels, 60p, YPbPr 4:2:0, 300 Mbps / H.265, 8-bit, 4096 x 4096 pixels, 60p, YPbPr 4:2:0, 300 Mbps	
Audio format	AAC-LC, 16-bit, stereo		
Storage	4 TB	512 GB ³	
Operating system	Linux ⁴		
Power supply	AC 100–240 V, 50/60 Hz		
Maximum power consumption	64 W		
Dimensions (W x H x D)	Approx. 210 mm x 44 mm x 295 mm (8 1/4" x 1 23/32" x 11 5/8") (Excluding feet)		Approx. 195 mm x 25 mm x 123.2 mm (7 3/4" x 63/64" x 4 7/8") (TBD)
Weight	Approx. 2.0 kg (4.41 lbs) (Excluding AC adapter and cord)		Approx. 0.23 kg (0.51 lbs) (TBD)
Operating environment	Operating temperature: 0–40 °C (32–104 °F), operating humidity: 10–80 % (no condensation)		Operating temperature: 0–45 °C (32–113 °F) ⁴ , operating humidity: 10–80 % (no condensation)


¹ When four HDMI™ outputs are used simultaneously. ² ET-FMP50 only. Available via a firmware update from CY2025 Q1. ³ For the ET-FMP20 (512 GB) and ET-SBFMP10 (512 GB), approximately 30 GB of the total storage space is allocated for system usage and is unavailable to the user. ⁴ The operating temperature range may differ according to the specific projector model paired with the ET-SBFMP10.

Projectors Compatible with ET-SBFMP10



ET-SBFMP10 is designed to suit any Panasonic projector with an Intel® SDM standard-compatible SLOT. Compatible models comprise the PT-RQ25K Series, PT-RZ14K, PT-REQ15 Series, PT-REZ15 Series, and PT-RQ7 Series. Compatibility with projectors planned for release in the future is anticipated.

Optional Accessories

• Rack-Mount Kit for 2x ET-FMP50/FMP20 ET-PKFMJ2

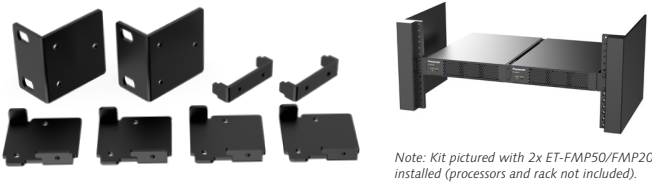

• Rack-Mount Kit for 1x ET-FMP50/FMP20 ET-PKFMJ1

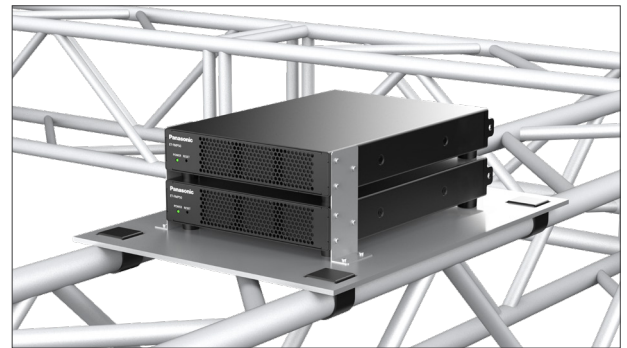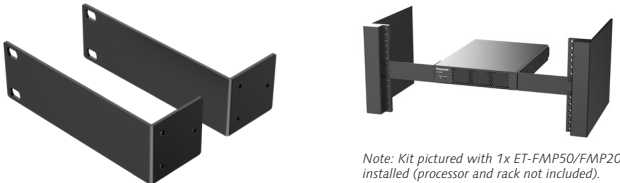

Reference example showing installation on trusses.

Panasonic CONNECT

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Availability of products and accessories may vary by country or region. Products may be subject to export control regulations. The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. NDI® is a registered trademark of NewTek, Inc. All Nikon trademarks are trademarks of Nikon Corporation. Intel and the Intel logo are trademarks of Intel Corporation or its subsidiaries. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries. All other trademarks are the property of the respective trademark owners. © Panasonic Connect Co., Ltd. 2024.



For more information about Panasonic projectors, please visit:
 Projector Global Website – <https://panasonic.net/cns/projector/>
 Facebook – www.facebook.com/panasonicprojectoranddisplay
 YouTube – www.youtube.com/user/PanasonicProjector

All information included here is valid as of May 2024.

ET-FMP50Series_G1 Printed in Japan.